




## Tp Link Td-w8951ND


**Step 01:** Open the web browser (Internet Explorer/Mozilla Firefox)  
Type in the address bar 192.168.1.1.



OR,

Open the Run Program and type <http://192.168.1.1>  
U can open the Run Program like this way


 +  Click this button on the keyboard

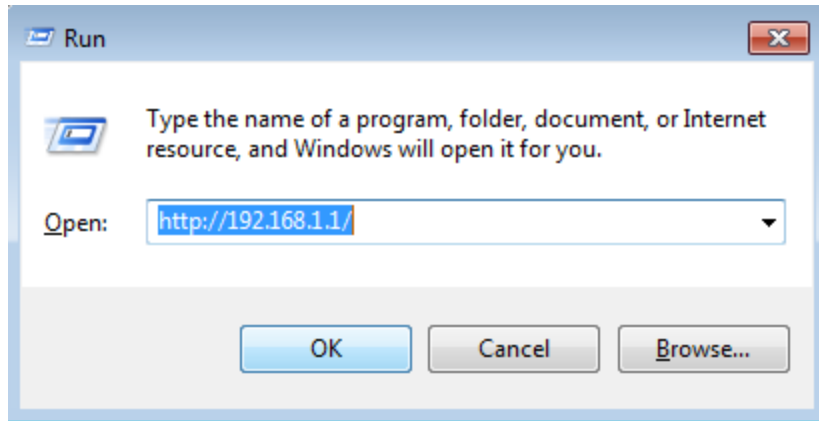

Then click ok to proceed.

Put the username as, User name: admin

Type the password as, Password: admin

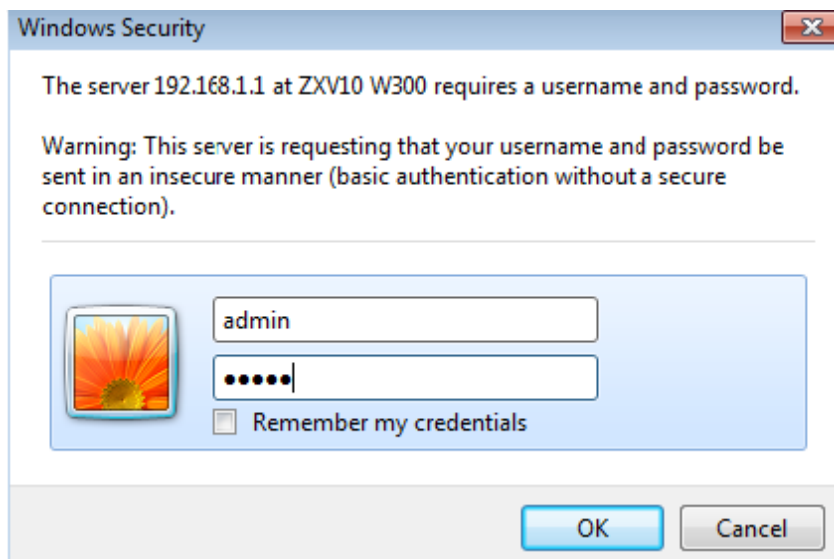



**Status**   Quick Start   Interface Setup   Advanced Setup   Access Management   Maintenance   **Status**   Help

Device Info   System Log   Statistics

**Device Information**

Firmware Version : 5.0.0 Build 120522 Rel.23978  
MAC Address : c0:4a:00:c6:3c:75

**LAN**

IP Address : 192.168.1.1  
Subnet Mask : 255.255.255.0  
DHCP Server : Enabled

**Wireless**

Current Connected Wireless Clients number is 0

ID	MAC
----	-----

**WAN**


PVC	VPI/VCI	IP Address	Subnet	GateWay	DNS Server	Encapsulation	Status
PVC0	1/32	N/A	N/A	N/A	N/A	Bridge	Down
PVC1	0/33	N/A	N/A	N/A	N/A	Bridge	Down
PVC2	0/35	N/A	N/A	N/A	N/A	Bridge	Down
PVC3	0/100	N/A	N/A	N/A	N/A	Bridge	Down
PVC4	8/35	N/A	N/A	N/A	N/A	Bridge	Down
PVC5	8/48	N/A	N/A	N/A	N/A	Bridge	Down
PVC6	0/38	N/A	N/A	N/A	N/A	Bridge	Down

**ADSL**


ADSL Firmware Version : FwVer:3.20.17.0\_TC3087 HwVer:T14.F7\_11.2  
Line State : Down  
Modulation : N/A  
Annex Mode : N/A

	Downstream	Upstream	
SNR Margin :	N/A	N/A	db
Line Attenuation :	N/A	N/A	db
Data Rate :	N/A	N/A	kbps
Max Rate :	N/A	N/A	kbps
CRC :	N/A	N/A	

step 3:- in Quick Start click run wizard to do the settings.

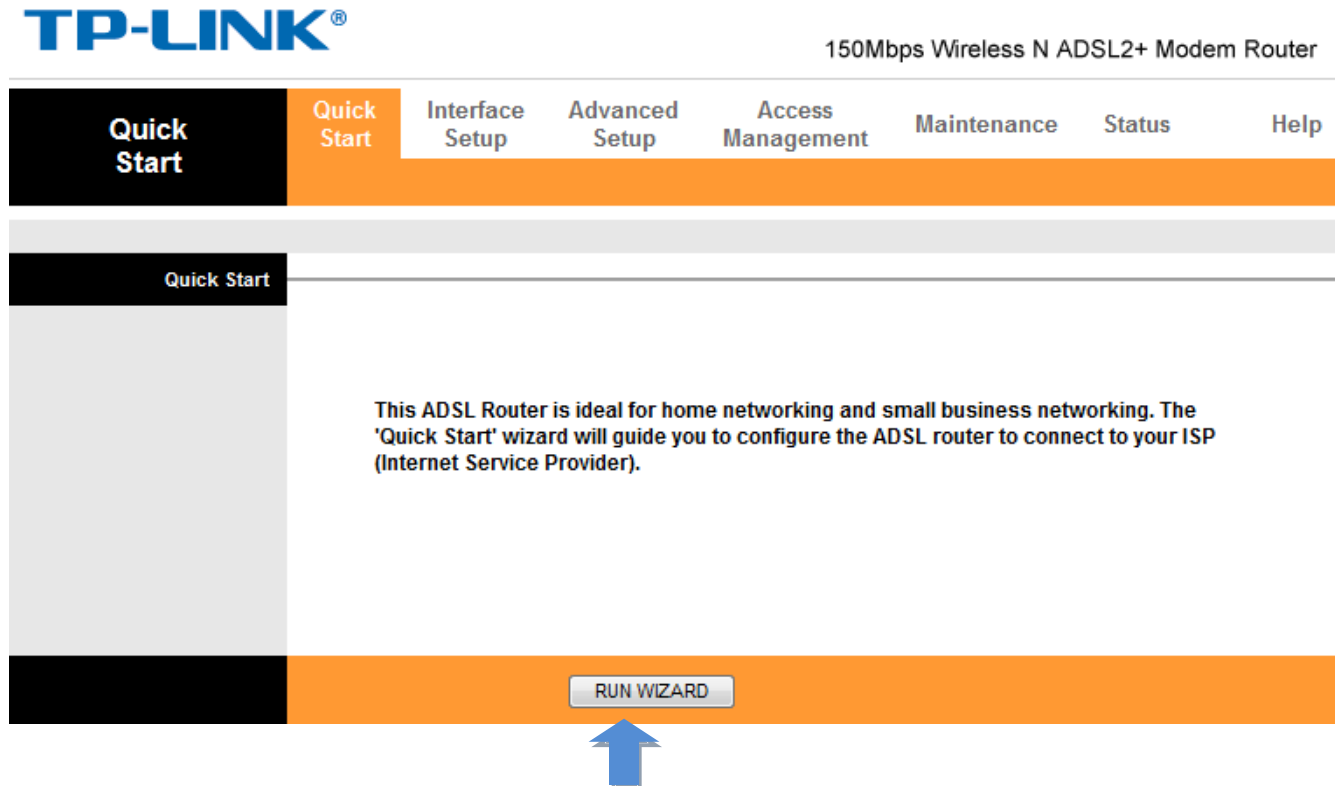


step 4:- in Quick Start click NEXT to continue the settings.

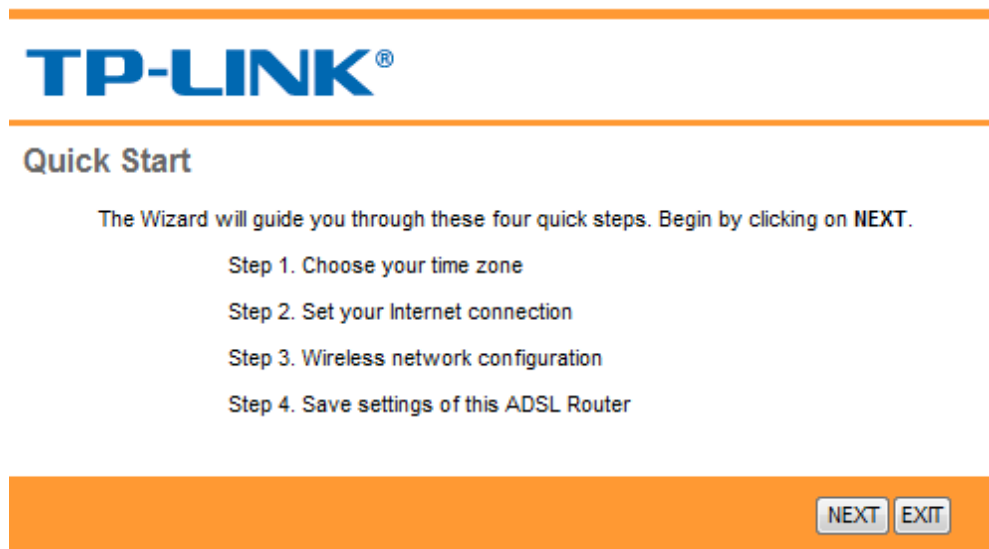

step 5:- Choose the **Time Zone**.

---



---

### Quick Start - Time Zone

Select the appropriate time zone for your location and click **NEXT** to continue.


(GMT+05:30) Chennai, Kolkata, Mumbai, New Delhi ▼

**BACK** **NEXT** **EXIT**

Click on **NEXT**

Step 6:- Select the **ISP: PPPoE/PPPoA**, then click **NEXT**

---



---

### Quick Start - ISP Connection Type

Select the Internet connection type to connect to your ISP. Click **NEXT** to continue.

<input type="radio"/> Dynamic IP Address	Choose this option to obtain a IP address automatically from your ISP.
<input type="radio"/> Static IP Address	Choose this option to set static IP information provided to you by your ISP.
<input checked="" type="radio"/> PPPoE/PPPoA	Choose this option if your ISP uses PPPoE/PPPoA. (For most DSL users)
<input type="radio"/> Bridge Mode	Choose this option if your ISP uses Bridge Mode.

**BACK** **NEXT** **EXIT**

**Step 7:-** Type the Username & Password which was given when you got the connection.  
VPI 8 , VCI 35  
Connection Type:PPPoE LLC



## Quick Start - PPPoE/PPPoA

Enter the PPPoE/PPPoA information provided to you by your ISP. Click **NEXT** to continue.

Username:

Password:

VPI:  (0~255)

VCI:  (1~65535)

Connection Type:  ▼

Click on **NEXT**

**step 8:-** in Router click Wlan button to do the Wi-Fi settings.

**Access point: Activated**

On SSID, SLT given as a router name but if you like you can type whatever the name you like.

**Authentication type: WPA-PSK/WPA2-PSK**

**Encryption: TKIP/AES**

**Pre-Shared key** is the one shows your Wi-Fi password. You have to create a new password for that. It should be 8 or more than 8 characters.



## Quick Start - Wan

You may enable/disable Wan, change the Wan SSID and Authentication type in this page. Click **NEXT** to continue.

Access Point :  Activated  Deactivated

SSID :

Broadcast SSID :  Yes  No

Authentication Type :

Encryption :

Pre-Shared Key :  (8~63  
ASCII characters or 64 hexadecimal characters)

Step 9: Click **NEXT** to complete the quick start.



## Quick Start Complete !!

The Setup Wizard has completed. Click on **BACK** to modify changes or mistakes. Click **NEXT** to save the current settings.

step 10:-click **NEXT** to save the settings.



## Quick Start Completed !!

Saved Changes.

CLOSE

**Step 11:-** Click **Maintenance** to confirm the settings.

Go to **system Restart** and select **current settings** to **restart** the router.



150Mbps Wireless N ADSL2+ Modem Router

<b>Maintenance</b>	Quick Start	Interface Setup	Advanced Setup	Access Management	<b>Maintenance</b>	Status	Help
	Administration	Time Zone	Firmware	SysRestart	Diagnostics		
<b>System Restart</b>	System Restart with : <input checked="" type="radio"/> Current Settings <input type="radio"/> Factory Default Settings						
	<p>RESTART</p>						


step 12:- Wait to restart the connection.



150Mbps Wireless N ADSL2+ Modem Router

<b>Maintenance</b>	Quick Start	Interface Setup	Advanced Setup	Access Management	<b>Maintenance</b>	Status	Help
	Administration	Time Zone	Firmware	SysRestart	Diagnostics		

SYSTEM RESTART



The system is restarting. Please wait...



